

TRACK WIDTH (in.)	TRACK SERIES	PRODUCT FAMILY	PART NUMBER	OEM PART NUMBER	TREAD				GUIDE/DRIVE LUGS		CARCASS			
					Qty	Height (in.)	Tip width (in.)	Pitch (in.)	Qty	Length (in.)	Plies	Main cable size (mm)	Thickness (mm)	
8000T	16	5500	General AG	651-1604	R222974	48 RH	2.6	2.25	6.9	48	4.7	4	5.4	41
		5500	General AG	651-1605	R222975	48 LH	2.6	2.25	6.9	48	4.7	4	5.4	41
		3500	General AG	631-1608	R241742	96	2.6	2.25	6.9	48	4.1	3	5.4	34
		2500	General AG	621-1607	R246868	96	2.1	2.65	6.9	48	4.1	3	5.4	31
	18	5500	General AG	651-1804	R222976	96	2.6	2.25	6.9	48	4.7	4	5.4	41
		5500	High roading	651-1823	R312148	48 RH	2.6	2.25	6.9	48	4.2	4	5.4	39
		5500	High roading	651-1824	R312149	48 LH	2.6	2.25	6.9	48	4.2	4	5.4	39
		3500	General AG	631-1803	R241743	96	2.6	1.5	6.9	48	4.1	4	5.4	32
		2500	General AG	621-1806	R246869	96	2.1	2.0	6.9	48	4.1	3	5.4	29
	25	5500	General AG	651-2504	R241750	96	2.6	2.25	6.9	48	4.7	4	5.4	41
		4500	General AG	F25AT01942	R545939	96	2.6	1.5	6.9	48	4.7	3	4.3	32
		3500	General AG	631-2509	R241745	96	2.6	1.5	6.9	48	4.1	4	4.3	32
		3500	High traction	631-2503	R220829	78	2.6	1.5	8.5	48	4.1	4	4.3	32
		2500	General AG	621-2510	R246870	96	2.1	2.0	6.9	48	4.1	3	4.3	29
	30	5500	General AG	651-3039	R292531	96	2.6	2.25	6.9	48	4.7	4	5.4	41
		4500	General AG	F30AT02943	R545938	96	2.6	1.5	6.9	48	4.7	3	4.3	32
		3500	General AG	631-3040	R292528	96	2.6	1.5	6.9	48	4.1	4	4.3	32
		3500	High traction	631-3038	R292526	78	2.6	1.5	8.5	48	4.1	4	4.3	35
		2500	General AG	621-3037	R293500	96	2.0	1.75	6.9	48	4.1	3	4.3	29
	8RT	16	6500	General AG	E16AY02944	R545855	50	2.8	2.5	7.3	46	5.3	4	6.7
		6500	General AG	E16AY02945	R545854	50	2.8	2.5	7.3	46	5.3	4	6.7	44
		4500	General AG	F16AY02946	R545853	50	2.6	1.6	7.3	46	4.5	4	5.4	37
		4500	General AG	F16AY02947	R545852	50	2.6	1.6	7.3	46	4.5	4	5.4	37
18		6500	General AG	E18AY02948	R545859	100	2.8	2.5	7.3	46	5.3	4	6.7	44
		6500	High roading	E18AY02949	R545857	50	2.8	2.5	7.3	46	5.3	4	6.7	44
		6500	High roading	E18AY02950	R545858	50	2.8	2.5	7.3	46	5.3	4	6.7	44
		4500	General AG	F18AY02951	R545856	100	2.6	1.6	7.3	46	4.5	4	5.4	37
24		4500	General AG	F24AY03010	R545860	100	2.6	1.6	7.3	46	4.5	4	5.4	37
25		6500	General AG	E25AY03011	R545862	100	2.8	2.5	7.3	46	5.3	4	5.4	42
		4500	General AG	F25AY02952	R545865	100	2.6	1.6	7.3	46	5.3	4	5.4	37
		4500	General AG	F25AY03012	R545861	100	2.6	1.6	7.3	46	4.5	4	5.4	37
30		6500	General AG	E30AY03013	R545864	100	2.8	2.5	7.3	46	5.3	4	5.4	42
		4500	General AG	F30AY02953	R545866	100	2.6	1.6	7.3	46	5.3	4	5.4	37
		4500	General AG	F30AY03014	R545863	100	2.6	1.6	7.3	46	4.5	4	5.4	37
9000T		30	5500	General AG	653-3010	R241748	92	2.9	2.7	8.4	54	5.25	4	5.4
		3500	General AG	633-3019	R257977	92	2.8	1.6	8.4	54	4.5	4	5.4	37
		2500	General AG	623-3020	R293501	94	2.0	2.3	8.2	54	4.5	3	5.4	34
	36	5500	General AG	653-3601	R241749	92	2.9	2.7	8.4	54	5.25	4	5.4	41
		3500	General AG	633-3606	R257978	92	2.8	1.6	8.4	54	4.5	4	5.4	37
9RT	30	6500	Scraper	E30AV02954	R545869	88	2.3	3	9.0	50	5.3	4	6.7	44
		6500	General AG	E30AV03019	R545868	88	2.9	2.7	9.0	50	5.3	4	5.4	44
		4500	General AG	F30AV02955	R545872	88	2.6	2.2	9.0	50	5.3	4	5.4	37
		4500	General AG	F30AV03020	R545867	88	2.6	2.2	9.0	50	4.5	4	5.4	37
	36	6500	General AG	E36AV03021	R545871	88	2.9	2.7	9.0	50	5.3	4	5.4	44
		4500	General AG	F36AV03022	R545870	88	2.6	2.2	9.0	50	4.5	4	5.4	37

AGRICULTURAL TRACK



JOHN DEERE



Printed in Canada.

1507_Camso_AgBrochureTracks_JD

Camso is the best of Camoplast and Solideal.
To keep moving forward while staying true to our history,
we're now the Road Free company.

camso.co



FORMERLY
CAMOPLAST
SOLIDEAL



CAMOPLAST DURABUILT
TRACKS ARE BECOMING
CAMSO TRACKS






GENERAL AG APPLICATIONS

Built to provide an excellent combination of traction and comfort with minimal soil disturbance

SPECIALTY APPLICATIONS

Available for selected models/series

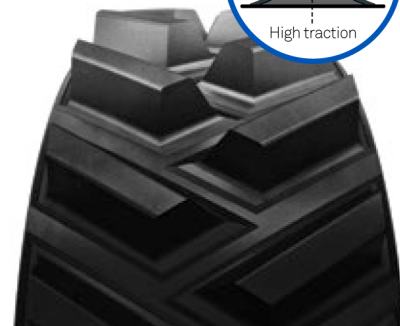

HIGH TRACTION

Optimized for deep penetration in hard soils

Large tread pitch and narrow tip width treadbar

- Increases soil penetration
- Excellent mud cleanout in muddy conditions

Traction

Less Compaction

Roading Ability

HIGH ROADING

Optimized tread life, ride quality and control for roading operation or high pulling on hard ground

Diagonal tread pattern and chevron tapered wide tip width treadbar

- Added tread volume
- Increases carcass stiffness
- Provides up to 10% more surface area

Traction

Less Compaction

Roading Ability

SCRAPER

Built to withstand the toughest commercial or agricultural scraper conditions with maximum service life

Trackshield™: 45% increased puncture and wear resistance (over 5500)

6.7 mm cable: 24% increased tear resistance (over 5.4 mm)

GUIDE LUGS

Maximizes guiding surface

- Optimized lug geometry

AVAILABLE ON

4500 Increases side load performance

6500 Operating in side hill application greatly increases lug life

EXCLUSIVE ENDLESS SINGLE CURE TECHNOLOGY

Ensures uniform tension throughout the track

- Consistent cable position to minimize internal stress
- Specific rubber positioned consistently at targeted areas
- No carcass distortion

TREAD BAR

Provides perfect balance between traction, cleanout and minimized ground disturbance
Optimized for even tread wear and reduced vibration generating an unmatched ride quality

- Chevron tapered and diagonal treadbar design

TRACKSHIELD™ CARCASS

Increases the life of your track

- Provides a wear and puncture-resistant carcass

AVAILABLE ON

4500 +20% improvement (over 3500)

6500 +45% improvement (over 5500)

INDUSTRY-LEADING MAIN CABLE

Resists high tensions

- The biggest and strongest cables on the market

AVAILABLE ON

6500 6.7 mm cable: 24% increase in tear resistance (over 5.4 mm)

RUBBER COMPOUNDS

Improves resistance to cutting, gouging and tearing

Slows rubber wearing, aging and cracking

- Combination of up to 6 specific compounds (treads, carcass, guide lugs)

